




AIRSLIM M

The Anemol AIRSLIM M fan series is ideal for installation on ceilings up to five metres high. The innovative motor design, just 5 cm thick, makes this an extremely lightweight and easy-to-install fan. This model features seven aluminium blades and a drive unit integrated into the ceiling bracket.

TECHNICAL DRAWING

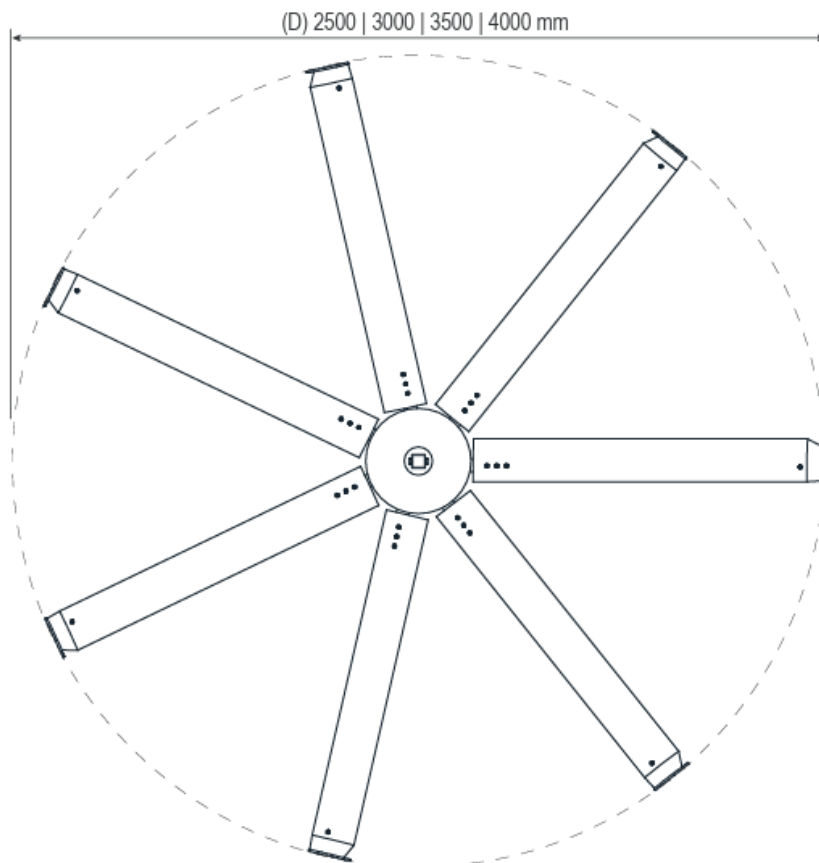

Parameter	AIRSLIM M 250	AIRSLIM M 300	AIRSLIM M 350	AIRSLIM M 400
Diameter (mm)	2500	3000	3600	4000 mm
Blades (Number)	7			
Unit weight	25 kg	28 kg	31 kg	34 kg
Input power	110VAC ~ 240VAC I, 50/60 Hz			
Max. motor current	2.0 A	1.5 A	1.1 A	
Power	350W			
Max. speed	150 RPM	100 RPM	70 RPM	56 RPM
Air flow rate (m³/h)	81,645 m³/h	98,735 m³/h	120,925 m³/h	131,673 m³/h
Protection	IP55			
Noise level	<40dBA			
Max. coverage area	381 m²	461 m²	564 m²	616 m²
Style / Material	Aerospace aluminium			
Controllers	Remote control			
Colours	Black matte motor and aluminium blades			
Extensions	1500 - 2000 mm			
Motor type	Brushless EC motor with neodymium magnets			
Certifications	IECEE CB / BSMI			

The technical documentation is updated regularly. Anemoi reserves the right to amend all or part of the content of this document without prior notice.