




MAGNOCOOL M

The MAGNOCOOL M series (M12, M18, M26 and M30) represents excellence in portable evaporative cooling from ANEMOI, offering an eco-friendly, low-energy alternative for large areas. Thanks to its robust design and its ability to generate massive airflows through high-efficiency cooling panels, this range guarantees an immediate drop in operating temperature.

MODELS

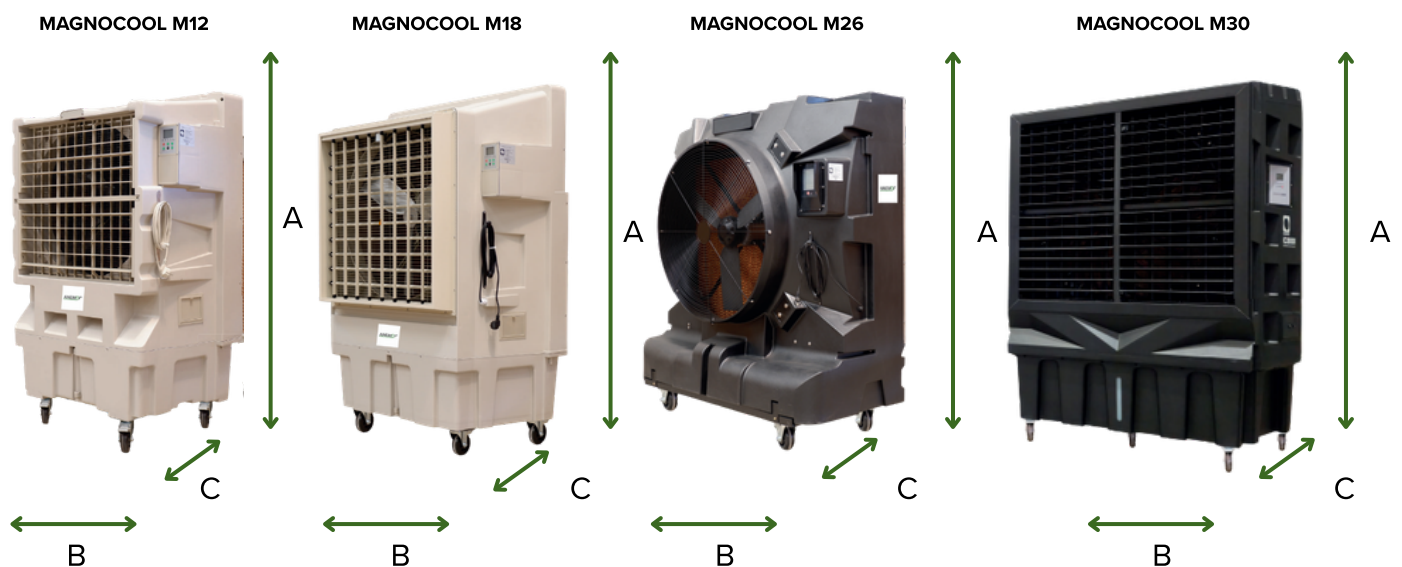

La documentación técnica se actualiza periódicamente. Anemoi se reserva el derecho de modificar todo o parte del contenido de este documento sin previo aviso.

Specification	Magnocool M12	Magnocool M18	Magnocool M26	Magnocool M30
Dimensions	(A) 1350mm x 930 (B) x 580 (C)	(A) 1560 x (B) 1130 x 720 (C)	(A) 1760 x (B) 1570 x 730 (C)	(A) 1950x (B) 1580 x 800 (C)
Power	440 W	700 W	750 W	
Coverage Area	150 m ² (1,615 sq ft)	200 m ² (2,153 sq ft)	300 m ² (3,230 sq ft)	300 m ² (3,230 sq ft)
Max. Airflow	12,000 m ³ /h (7,063 CFM)	18,000 m ³ /h (10,595 CFM)	26,000 m ³ /h (15,304 CFM)	30000 m ³ /h (176,55 CFM)
Speeds	3			
Water Tank	70 L	96 L	280 L	220 L
Weight	43 kg (94,80 lb.)	63 kg (138,89 lb)	110 kg (242,51 lb)	102 kg (224,87 lb)
Fan	Axial			
Filters	1			
Horizontal Swing	Automatic	Automatic	-	Automatic
Vertical Swing	Manual	Manual	-	
Noise Level	Max. 70 dB			
Timer	Yes, 24h Timer			
Extras	Water inlet, filling hatch, and drain			Water inlet. . UV lamp and ioniser

The technical documentation is updated periodically. Anemol reserves the right to modify all or part of the content of this document without prior notice.