




MAGNOCOOL M

The MAGNOCOOL M series (M12, M18, M26, M30 and M34) represents excellence in portable evaporative cooling from ANEMOI, offering an eco-friendly, low-energy alternative for large areas. Thanks to its robust design and its ability to generate massive airflows through high-efficiency cooling panels, this range guarantees an immediate drop in operating temperature.

MODELS


MAGNOCOOL M12

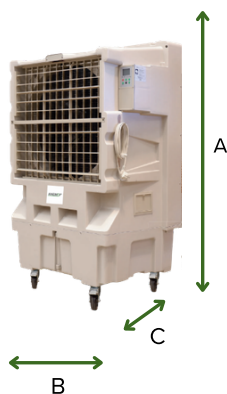


MAGNOCOOL M18




MAGNOCOOL M26

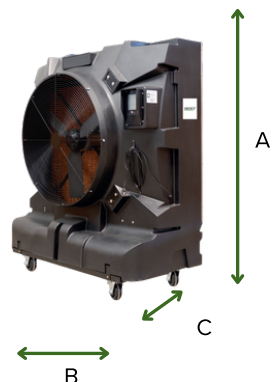

MAGNOCOOL M30

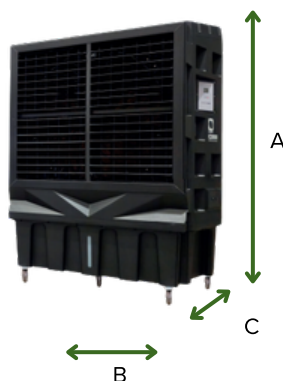

MAGNOCOOL M34

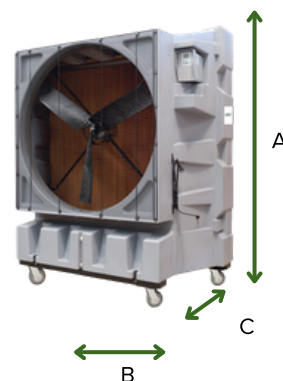

The technical documentation is updated regularly. Anemoi reserves the right to amend all or part of the content of this document without prior notice.

TECHNICAL SPECIFICATIONS

MAGNOCOOL M

Specification	Magnocool M12	Magnocool M18	Magnocool M26	Magnocool M30	Magnocool M34
Dimensions	(A) 1350mm x 930 (B) x 580 (C)	(A) 1560 x (B) 1130 x 720 (C)	(A) 1760 x (B) 1570 x 730 (C)	(A) 1950x (B) 1580 x 800 (C)	(A) 2240 x (B) 1970 x (C) 920
Power	440 W	700 W	750 W		1000 W
Coverage Area	150 m ² (1,615 sq ft)	200 m ² (2,153 sq ft)	300 m ² (3,230 sq ft)	300 m ² (3,230 sq ft)	500 m ² (5,381 sq ft)
Max. Airflow	12,000 m ³ /h (7,063 CFM)	18,000 m ³ /h (10,595 CFM)	26,000 m ³ /h (15,304 CFM)	30,000 m ³ /h (17,655 CFM)	34000 m ³ /h (20 028 CFM)
Speeds	3				
Water Tank	70 L	96 L	280 L	220 L	350 L
Weight	43 kg (94,80 lb.)	63 kg (138,89 lb)	110 kg (242,51 lb)	102 kg (224,87 lb)	182 kg (401,24 lb)
Fan	Axial				
Filters	1				
Horizontal Swing	Automático	Automático	-	Automático	-
Vertical Swing	Manual	Manual	-		-
Noise Level	Máx. 70 dB				
Timer	Yes, 24h Timer				
Extras	Water inlet, filling hatch, and drain			Water inlet. . UV lamp and ioniser	Water inlet, filling hatch, and drain

The technical documentation is updated periodically. Anemoi reserves the right to modify all or part of the content of this document without prior notice.